

## TECHNICAL DATA



Item number	9000800
Power	2,5Watt
Operating voltage:	5V / 1A
Frequency band	2400MHz ~ 2485MHz
Transmitting range Wi-Fi	up to 50 meters
Bluetooth transmission range	up to 10 meters
Operating system	Embedded Linux OS
CPU	RT 3903 MIPS 600MHz Core CPU
Flash / Ram	16MB Flash / 64 MB DDR 2
Wireless security	WEP 64 bit, WEP 128 bit, WPA, WPA2, WPA+WPA2
Security	AES 128
Connector	Micro USB
LAN	RJ45 (10/100 LAN)
Max. number of lights/gateway	128 pcs
Max. number of gateway/app	12 pcs
APP Version	IOS: 10.0 or above   Android: 4.4.4 or above
Bluetooth version	4.0 or above
Ambient temperature	0°C - +40°C
Housing	ABS plastic
Weight	0,19kg



## TYPES




## DIMENSIONS (mm)

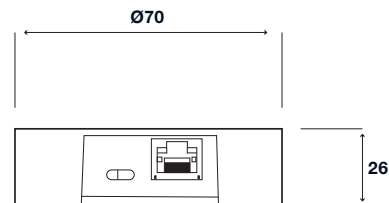

## LIGHTMANAGEMENT



Download our app for the eyeconex LIGHTMANAGEMENT

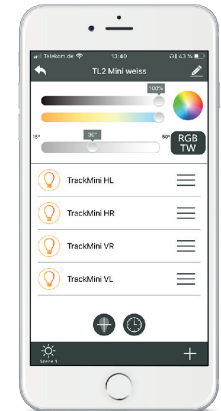

## PRODUCT DESCRIPTION

- for installations of more than 128 luminaires/lamps
- interface Bluetooth to Wi-Fi
- master function with range up to 50 meters
- only compatible with Eyeconex Pro APP

## SCOPE OF SUPPLY

- Gateway
- Mounting plate
- Mounting screws