


TECHNICAL DATA

Power	6,3 - 10,5 W
Operating voltage	24 V DC
Type of luminaire	Light strip
LED Type	SMD
Control	PWM
Light efficiency	up to 152 lm/W
Colour consistency	SDCM3
Lifetime	L80 B10 50.000 h @ 10°C
Ambient temperature	-30°C to +10°C
Material	aluminium/PC
Cascading	no
Warranty	5 years
Scope of delivery	incl. 1 pc Hollow plug end cap




5 YEARS
WARRANTY


TYPES

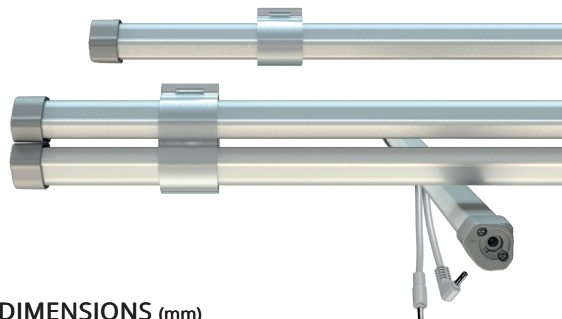

DIMENSIONS (mm)



BEAM ANGLE




HIGHLIGHTS

- cost effective retrofit system
- especially for refrigerated cabinets -30° to +10° (IP 65)
- flexible integration with multiple accessories
- brilliant light with CRI 90
- installation: via magnet or screw clip
- splash water protected socket connectors (both sides)

APPLICATIONS LCR-C

Mounting in the furniture head for illumination of the upper shelves.

- Refrigerated multideck cabinet (open / closed)
- Freezer
- Combi Freezer

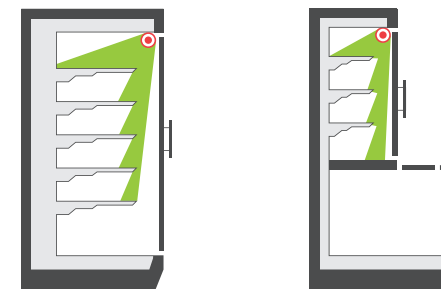

STANDARDS LCR-SERIES

IEC 60598-1-2014

IEC 60598-1-2014/AMD1:2017

IEC 60598-2-1-2020

IEC 60335-1-2010

IEC 60335-1-2010/AMD1:2013

IEC 60335-1-2010/AMD2:2016

IEC 60335-2-89:2010

IEC 60335-2-89:2010/AMD1:2012

IEC 60335-2-89:2010/AMD2:2015

Item number	Productcode	Power	Light colour Ledxon	CRI	Luminous flux	Beam characteristic	Length
9100770	LCR-L900-940-C	6,3 W	4000 K	90	959 lm	Canopy	900 mm
9100771	LCR-L900-957-C	6,3 W	5700 K	90	959 lm	Canopy	900 mm
9100772	LCR-L900-FM-C	6,3 W	Fresh meat	90	783 lm	Canopy	900 mm
9100773	LCR-L1200-940-C	8,4 W	4000 K	90	1279 lm	Canopy	1200 mm
9100774	LCR-L1200-957-C	8,4 W	5700 K	90	1279 lm	Canopy	1200 mm
9100775	LCR-L1200-FM-C	8,4 W	Fresh meat	90	1044 lm	Canopy	1200 mm
9100776	LCR-L1500-940-C	10,5 W	4000 K	90	1599 lm	Canopy	1500 mm
9100777	LCR-L1500-957-C	10,5 W	5700 K	90	1599 lm	Canopy	1500 mm
9100778	LCR-L1500-FM-C	10,5 W	Fresh meat	90	1305 lm	Canopy	1500 mm


ACCESSORIES

Art. No.: 9100763




Connection cable with plug male, grey 4,0m

Art. No.: 9100759



Connection cable with angled plug, grey 4,0m

Art. No.: 9100767




Strip lock, transparent

Art. No.: 9100769




Hollow plug end cap, grey

Art. No.: 9100760



Clip transparent, 2 pcs set

Art. No.: 9100761



Clip transparent with magnet, 2 pcs set

Item description	Item number
Connection cable plug male, grey 4,0m	9100763
Connection cable angled plug, grey 4,0m	9100759
LCR Strip lock (plug), transparent	9100767
Hollow plug end cap, grey	9100769
LCR Clip transparent 2er Set	9100760
LCR Clip transparent with magnet, 2 pcs set	9100761

IMPORTANT NOTES

All technical parameters apply to the entire product. Due to the complex manufacturing process of light emitting diodes, the specified typical LED parameters are only purely statistical values and may deviate.

The specified type of use must be strictly adhered to. Deviations may affect the stability of the fixture. Please observe the information in the mounting instructions before using the products.

Mercury content	0,0 mg
Mercury-free	yes
Professional disposal according to WEEE	yes

NOTES TO THE LIFE TIME

Decisive factors for the life time are the ambient temperature and the operating temperature (Tc). Exceeding the permissible limits results in a substantial reduction of the lifetime and can even lead to the destruction of the products. The specified lifetime represents a statistical quantity.

NOTES TO ELECTRICAL AND PHOTOMETRIC DATA

Colour coordinates according to CIE 1931

Rated ambient temperature: $t_a = 25^\circ$

Measuring tolerance colour coordinates (x/y) $\pm 0,005$

Tolerance range of electrical / photometric data: $\pm 10\%$

DISCLAIMER

Changes and errors excepted. Due to the continuous development of all products, technical and design changes can occur at any time. Make sure that you always use the latest version of the data sheet.

Further product data as well as current information can be found at www.lxpro.pl

5 YEARS
WARRANTY

